



**Sorenson Lighted Controls**  
Illuminating Innovation™

# 61 Series

WHEN REAL ESTATE BEHIND THE PANEL IS AT A PREMIUM!



**The 61 Series is an ideal indicator for applications where** behind panel spacing is limited. With a short .500" long body it is a compact press fit installation into panels with a minimum 0.30" thickness and a 0.312" mounting hole. Tinnerman clips are available for applications where a permanent installation is necessary. Wire leads are the only termination available on the 61 Series and are available in a wide range of colors, temperature ratings, and lengths. Neon, incandescent or LED illumination can be specified, but due to the compact size of the 61 Series all components will be installed in the leads.

## Typical Applications:

- Aircraft Call Lights
- Instrumentation
- Test Equipment
- Medical Equipment
- Audio Video
- Food Equipment
- Automotive Aftermarket
- Consumer Goods
- Exercise Machines

For Information:


800.275.7089 • 860.527.3092

sales@solico.com • www.solico.com


# 61 SERIES

## Technical Data


- Press fits into 0.312 panel hole
- LED, Incandescent and Neon illumination
- Two lens styles available
- Body Material: Nylon
- Lens Material: Polycarbonate
- Bezel Material: Brass (plated)
- Wire Gauge: 18ga
- Wire Strip 1/2
- Panel Thickness 0.030" min

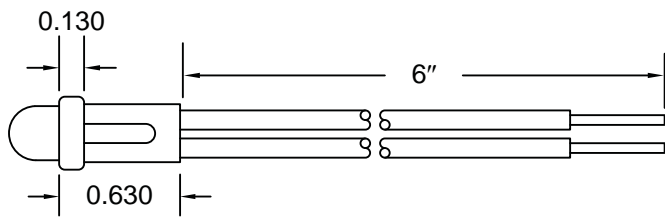


### Mounting Hole



### Lens 21



### Lens 22



Shown with optional red wires and terminals.

Series	Lamp			Termination		Base		Bezel		Lens				
XX	XX			X		X		X		XXX			X 0	
61	Voltage	Type	Code	Style	Code	Color	Code	Finish	Code	Style	Code	Color	Code	
	2	LED	10	6" Wire	1	White	1	Chrome	2	High Translucent <sup>2</sup>	211	Red	1	
	6	LED	11 <sup>3</sup>	Special	X			Black	3	High Rings	216	Amber	2	
	14	LED	12 <sup>3</sup>							Dome Translucent <sup>2</sup>	221	Clear <sup>1</sup>	3	
	28	LED	13 <sup>3</sup>							Dome Lines	225	Green	4	
												Blue	5	
	6	INCAND	32											
	14	INCAND	35											
	28	INCAND	39											
	125	NEON	50 <sup>3</sup>											
	250	NEON	52 <sup>3</sup>											
	Special		XX											

1. Specify LED color if applicable  
 2. Translucent lens is not recommended for use with LED  
 3. Components provided in leads

### Additional Options

- Terminals attached to wire leads